

Directional Coupler 40dB

Product Overview

Phase 2 Microwaves Ltd offers a range of standard coaxial Directional Couplers in N Type, SMA & 2.92mm configurations covering bands from 2 to 40GHz.

These Directional Couplers offer cost effective solutions to many industry requirements.

In addition to these standard Couplers Phase 2 Microwave Ltd can also offer bespoke designs optimised to meet customer particular requirements.

To discuss these requirements in more detail contact

sales@phase2mw.co.uk





Tel: +44 (0) 1438 313502 - Email sales@phase2mw.co.uk - Website www.phase2mw.co.uk

Directional Coupler 40dB



Key Specification	
Model Number	007535
Operating Frequency	0.1 - 1GHz
Coupling	40dB +/-1.0dB
Coupling Variation	+/-0.8dB
Insertion Loss	< 0.2dB (Inc. coupling loss)
VSWR	<1.3:1
Directivity	>20dB
Power Handling	50W
Connectors	SMA Female


Environmental

Temperature Range

-40 to +85 Degrees C

Mechanical	
Housing Material	Aluminium
Interface Control Drawing	007535-ICD
RoHS	Compliant

Note: All information is correct at date of issue. Specifications are subject to change without notice Revision: 01

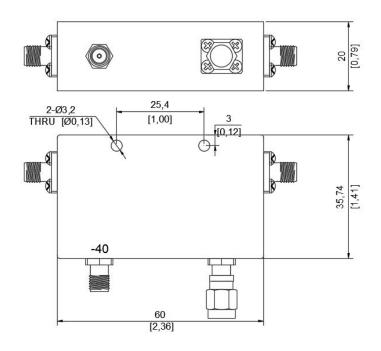



Tel: +44 (0) 1438 313502 - Email sales@phase2mw.co.uk - Website www.phase2mw.co.uk